



Provided by Xpert Survey Equipment
[Click Trimble Trimmark for Product Info and Updated Pricing](#)

KEY FEATURES

Versatile: Use as base, repeater or rover

Flexible: 2 W, 10 W, or 25 W power output

Channel spacing programmable at
 12.5 kHz or 25 kHz

Easy to use and configure

Built-in channel selector and monitor

Rugged and weatherproof



RUGGED AND VERSATILE MULTICHANNEL RADIO MODEM

The TRIMMARK™ 3 radio modem provides a convenient, versatile means of establishing a robust wireless data broadcast network for real-time, high-precision GPS survey and telemetry applications.

The rugged, compact TRIMMARK 3 radio modem is designed for use in tough environments and in a variety of situations.

The single unit is usable as a base station, repeater station, or rover receiver for maximum versatility. However you use it, you'll appreciate its simplicity and famous Trimble reliability and quality.

SELECT THE POWER YOU NEED

The TRIMMARK 3 radio modem provides selectable power outputs of 2 W, 10 W, or 25 W to support both short and long-range operations, conserve battery life and minimize risk of interference with other systems.

A 25 W base unit broadcasts up to 15 km (8 miles) line-of-sight, under optimal conditions. Path obstructions and terrain can reduce the typical effective range to 10 km to 12 km (6 miles to 7 miles). One or two additional units can be networked as repeater stations to extend range, minimize base station moves, and provide seamless coverage around local obstacles such as large buildings or hills. The typical range of a 2 W repeater is 5 km to 8 km (3 miles to 5 miles).

A TRIMMARK 3 radio modem broadcasts or repeats data to Trimble survey-grade GPS receivers, such as the Trimble R8, 5800, Trimble R7, and 5700, that either contain an internal radio modem or are being used with an external rover radio. The TRIMMARK 3 is fully backward compatible with the TRIMMARK IIe radio modem, so it can be used in both new and existing systems.

CONFIGURE IT TO YOUR NEEDS

The TRIMMARK 3 radio modem can be configured completely and easily in the office by using the supplied WinFLASH utility on your computer. Many functions also can be configured in the field from the front panel or from the Trimble Survey Controller™ software used with your GPS survey receivers. The serial port communication settings are easily set to match the default settings on the GPS receiver.

You can configure each broadcast network to operate on one of up to 20 programmed channels via a built-in channel selector. Channel spacing of either 12.5 kHz or 25 kHz is programmable at the factory or by a service provider.

To reduce the risk of interference in a congested RF environment, you can use the built-in audio speaker to monitor activity on the selected channel. The unit also can automatically monitor the channel using its software selectable carrier detect function to detect other users on the channel before transmitting.

The TRIMMARK 3 radio modem is available as a stand-alone product as well as in convenient base and repeater equipment sets. Available in three frequency bands, the TRIMMARK 3 radio modem is designed to meet the licensing requirements of many countries around the world.

TRIMMARK 3 RADIO MODEM

STANDARD FEATURES

- Selectable 20-channel capacity
- Rugged weatherproof construction
- Configurable from front panel, survey controller, or from supplied WinFLASH utility on your computer
- Up to 15 km line-of-sight range
- Same unit can function as base station, repeater station, or rover receiver
- Selectable power outputs of 2 W, 10 W, or 25 W
- Programmable channel spacing of 12.5 kHz or 25 kHz
- Built-in channel selector
- Supports up to two repeaters in a network
- 4800, 9600 and 19200 baud rate over the air
- Retrievable/storable radio diagnostic information

TRIMMARK 3 BASE/REPEATER

Physical

Size 12.5 cm W x 22.9 cm D x 7.9 cm H
(4.9" W x 9.0" D x 3.1" H)

Weight 1.59 kg (3.5 lb)

Electrical

Power:
Input 12 V DC to 16 V DC, nominal

Connectors:
Power 2-pin LEMO (+VDC, GND)
Data 7-pin female LEMO (supports RXD, TXD and SGND)
Antenna TNC female

Environmental

Temperature:
Operating -40 °C to +65 °C (-40 °F to +149 °F)
Storage -55 °C to +75 °C (-67 °F to +167 °F)

Humidity 100%, fully sealed, weatherproof

TECHNICAL SPECIFICATIONS

Transmit Power¹ 2 W, 10 W, 25 W

Wireless Data Rate 4800 bps, 9600 bps, 19200 bps

Frequency Bands 410–420 MHz, 430–450 MHz, or 450–470 MHz
(Only one band per radio modem)

Channel Spacing 12.5 kHz or 25 kHz
(Only one spacing per radio modem)

Number of Channels² Can be ordered with up to 20 programmed frequencies, internally stored

RF Modulation Format Gaussian Minimum Shift Keying (GMSK)

Range (typical)³

25 W Base 10 km to 12 km (6 miles to 7 miles)

2 W Repeater 5 km to 8 km (3 miles to 5 miles)

Power Consumption ⁴	Voltage	Current	Nominal Load
2 W mode	12.6 V	0.8 A	~10 W
10 W mode	12.6 V	3.6 A	~45 W
25 W mode	12.6 V	8.0 A	~75 W


Serial Port One set of RS-232 signals available.
Data is 8 bits with selectable parity and 1 stop bit.
Supported data rates are 9600 bps, 19200 bps, and 38400 bps⁵

ANTENNA PHYSICAL SPECIFICATIONS	LENGTH (TYPICAL)	WEIGHT
<i>Standard antenna</i>		
0 dB UHF omni whip	47 cm (18.5 in)	0.5 kg (1.1 lb)
5 dB UHF omni whip	99 cm (39 in)	0.5 kg (1.1 lb)

1. Radios are configured as 25-W units at the factory.
2. Use the same frequency for all radio modems in the same wireless data network.
3. Varies with terrain and operational conditions. Up to 2 repeaters can be used to extend range.
4. Power consumption and battery life depend on the broadcast information content and wireless data rate (e.g., CMR versus RTCM SC-104 Ver 2.x packets at 1-Hz epoch rates).
5. Communications rate between the radio and GPS receiver; not wireless rate.

Specifications subject to change without notice.

© 2001–2004, Trimble Navigation Limited. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited registered in the United States Patent and Trademark Office and other countries. Trimble Survey Controller and TRIMMARK are trademarks of Trimble Navigation Limited. All other trademarks are the property of their respective owners. TID 12274A (11/04)

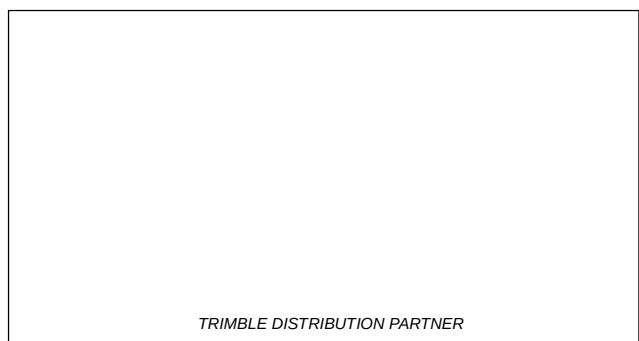

TRIMBLE DISTRIBUTION PARTNER

NORTH AMERICA

Trimble Geomatics and Engineering Division
5475 Kellenburger Road
Dayton, Ohio 45424-1099 • USA
800-538-7800 (Toll Free)
+1-937-245-5154 Phone
+1-937-233-9441 Fax

ASIA-PACIFIC

Trimble Navigation Singapore Pty Limited
80 Marine Parade Road
#22-06, Parkway Parade
Singapore 449269 • SINGAPORE
+65-6348-2212 Phone
+65-6348-2232 Fax

EUROPE

Trimble GmbH
Am Prime Parc 11
65479 Raunheim • GERMANY
+49-6142-2100-0 Phone
+49-6142-2100-550 Fax



www.trimble.com